

NEON³ RGB/RGB+ SERIES


DYNAMIC RGB/RGB+ IP65



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series		CCT		Output/Foot		Length
NEO3	-		-		-	
		RGB		HO (4.3watts RGB)		CC @XX (Custom cut, specify length)
		RGB27 (2700K)		(5.5 watts RGBW)		
		RGB30 (3000K)				
		RGB35 (3500K)				
		RGB41 (4100K)				



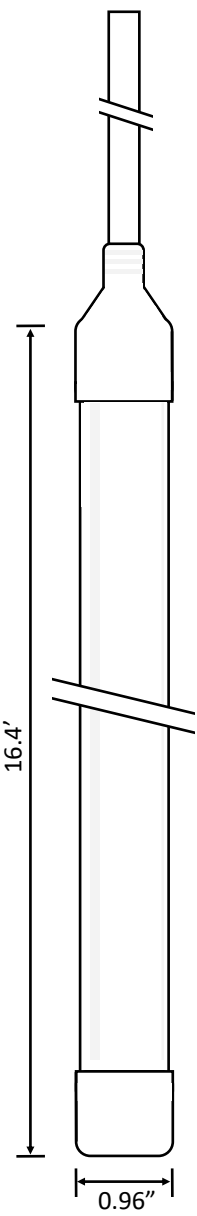


Model Number	NEO3-RGB-HO	NEO3-RGB27-HO	NEO3-RGB30-HO	NEO3-RGB35-HO	NEO3-RGB41-HO
Voltage	24VDC				
Lumens/foot	64	131	136	140	145
CRI	N/A	80+ (white diode)			
Watts/foot	4.3	5.5			
Cut section length	3.28"	3.28"			
Diode spacing (pitch) O.C.	0.55"	0.55"			
Diodes per foot	22	22			
Maximum run length	16.4'	16.4'			
Certifications	UL Listed	UL Listed			
Location Rating	IP65	IP65			

Features:

- 120° beam angle
- 24 Volt
- Top & side bend
- Bending radius of 5.9"
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

End Cap Options

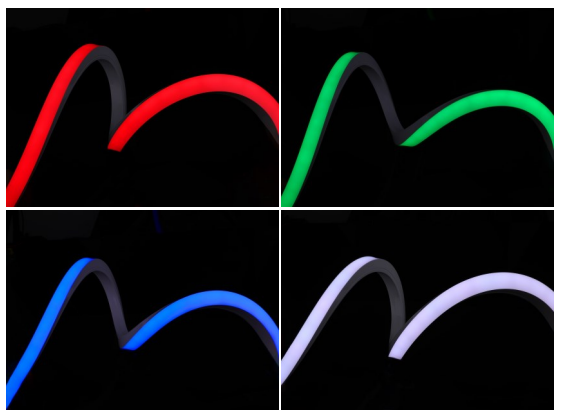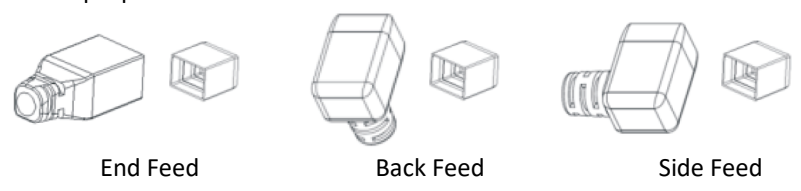

Note: Drawings not to scale.

All Omnilight products are tested and warranted for use exclusively with Omnilight controls & power supplies.

OL1

NEON³ RGB/RGB+ SERIES


DYNAMIC RGB/RGB+ IP65





Date: _____ Project: _____ Type: _____

Accessories:

OCH-CLIP-N3DY





Mounting clips
(included)



OCH-BRACKET-N3DY



Mounting Brackets
(optional)


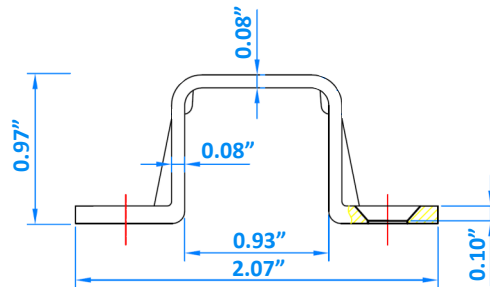


Channels:


OCH-FLEX-N3DY



Flexible Channel
(optional)

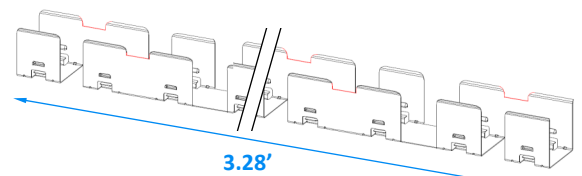

OCH-RIGID-N3DY



Rigid Channel
(optional)

