


# HUE-DMX-WC SERIES



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

<b>Series</b>						<b>Function</b>		<b>Color</b>
HUE	-	DMX	-	WC	-	[Grey Box]	-	[Grey Box]
						<b>RGB</b> (Color changing)		<b>WH</b> (White)
						<b>CCT</b> (Kelvin adjustable)		<b>BL</b> (Black)

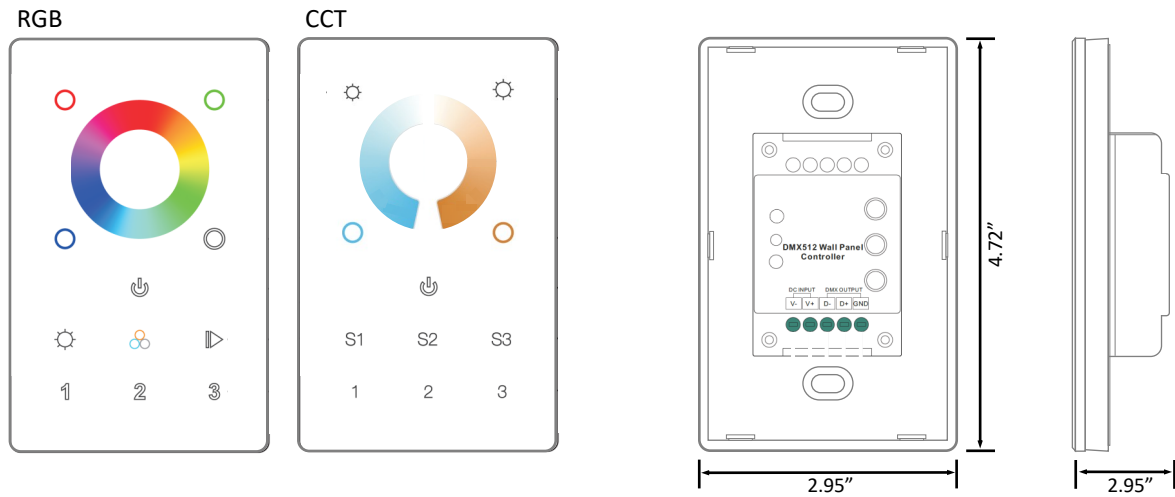

Note: Drawings not to scale.

Model Number	HUE-DMX-WC-RGB	HUE-DMX-WC-CCT
Output Signal	DMX512 + WIFI signal	DMX512
Power Supply	12-24VDC	
Power Consumption	< 20 mA	
Operating Temperature	32 - 104° F	

### Features:

- Capacitive touch glass interface
- Standard DMX512 signal output
- Controls 3 zones simultaneously or separately
- 50,000 hour life
- 5 year warranty
- IP20

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies