

HUE RGB+ SERIES


EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series	CCT	Output/Foot	Length
HUEWL			CC @XX (custom cut, specify footage)
	RGB27 (RGB+2700K)	HO (5.86watts)	
	RGB30 (RGB+3000K)		
	RGB41 (RGB+4100K)		
	RGBAM (RGB+Amber)		
	RGB272 (RGB+[2]2700K)	HO2 (7.32watts)	
	RGB302 (RGB+[2]3000K)		
	RGB412 (RGB+[2]4100K)		
	RGBAM2 (RGB+[2]Amber)		

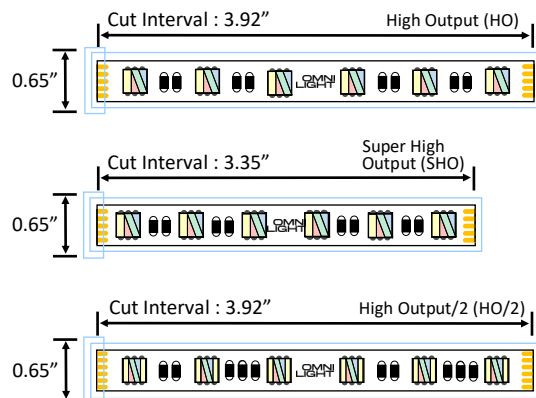

Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Note: Drawings not to scale.

Model Number		HUEWL-RGBXX-HO	HUEWL-RGBXX-SHO	HUEWL-RGBXX2-HO2
Lumens/foot	Red	40	45	40
	Green	85	100	85
	Blue	35	40	35
	Plus	2700K	125	150
	3000K	130	155	260
	4100K	135	160	270
	Amber	40	45	80
Watts/foot		5.86	7.02	7.32
Cut section length		3.92"	3.35"	3.92"
Diode spacing (pitch) O.C.		0.66"	0.56"	0.66"
Diodes per foot		19	22	19
Maximum run length		16'	13'6"	13'

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warranted for use exclusively with Omnilight power supplies

OL1