

# CONTINUUM SERIES


## EXTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

<b>Series</b>	-	<b>CCT</b>	-	<b>Output/Foot</b>	-	<b>Length</b>
CONWL		<div style="background-color: #cccccc; width: 40px; height: 20px; margin: 0 auto;"></div> <b>27</b> (2700K) <b>30</b> (3000K) <b>35</b> (3500K) <b>41</b> (4100K)		<div style="background-color: #cccccc; width: 40px; height: 20px; margin: 0 auto;"></div> <b>SO</b> (1.47 watts)		<div style="background-color: #cccccc; width: 40px; height: 20px; margin: 0 auto;"></div> <b>32</b> (full reel - 32.5 feet) <b>CC @XX</b> (custom cut, specify footage)

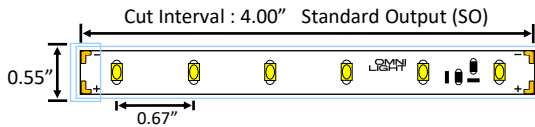

### Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Constant Current
- Up to 32.5' on single run
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Note: Drawings not to scale.

Model Number	CONWL-XX-SO	
Lumens/foot	2700K	130
	3000K	140
	3500K	145
	4100K	150
Watts/foot	1.47	
Cut section length	4.00"	
Diode spacing (pitch) O.C.	0.67"	
Diodes per foot	20	
Maximum run length	65.5'	



32.5' reels supplied with 24" IP65 lead

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies