

# ECONIC SERIES


## EXTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

Series	CCT	Output/Foot	Length
ECOWL	27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K)	SO (1.5watts) WO (2.95watts) HO (4.4watts)	16 (full reel - 16.4 feet)

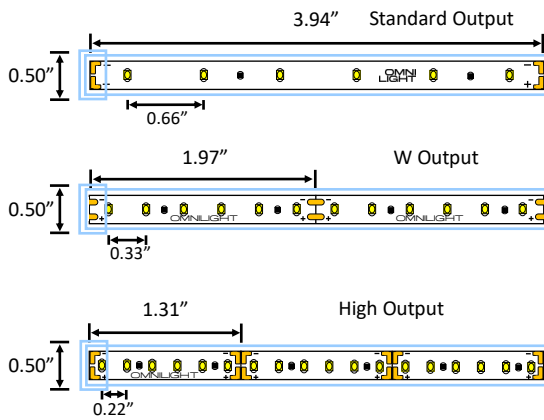

Note: Drawings not to scale.

### Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable\*
- 50,000 hour life
- 5 year warranty
- IP65

Model Number	ECOWL-XX-SO	ECOWL-XX-WO	ECOWL-XX-HO
Lumens/foot	2700K 114	265	330
	3000K 122	275	352
	3500K 133	285	355
	4100K 142	295	372
Watts/foot	1.50	2.95	4.40
Cut section length	3.94"	1.97"	1.31"
Diode spacing (pitch) O.C.	0.66"	0.33"	0.22"
Diodes per foot	19	37	55
Maximum run length	35'	32'	21'6"



16.4' bulk reels supplied with 24" IP65 lead

**\* cut ribbon cannot be repowered**

All Omnilight products are tested and warranted for use exclusively with Omnilight power supplies.