


# Neon3 WallWash Series

Beam Control : static white : IP65



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

Model Number	<b>NEO3WW-XX-HO</b>	
Lumens/foot	2400K	450
	2700K	455
	3000K	470
	3500K	475
	4100K	490
	5000K	495
Watts/foot	5.5	
Cut section length	9.84"	
Diode spacing (pitch) O.C.	1.63"	
Diodes per foot	7	
Maximum run length	16'	
Protection rating	IK07	

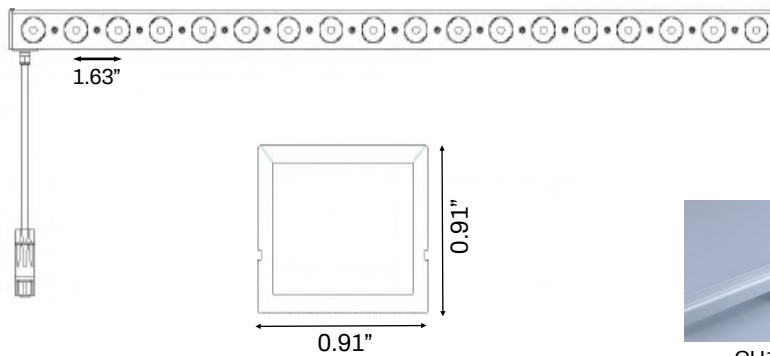

CL1-N3WS



CL2-N3WS



CH1-N3WS



CH2-N3WS



-RC

## Ordering Guide:

Series	CCT	Ribbon color	Output/Foot	Beam spread	Length	Mounting
NEO3WW	27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K)	WH (White) BK (Black)	HO (5.5 watts)	30 (30°) 45 (45°) 60 (60°)	CC @XX (custom cut, specify footage)	CL1-N3WS (bottom clip) CL2-N3WS (top clip) CH1-N3WS (rigid channel) CH2-N3WS (flex channel) -RC (to add rotating clip to channel)



All Omnilight products are tested and warranted for use exclusively with Omnilight power supplies

# Neon3 WallWash Series

Beam Control : static white : IP65




Date:

Project:


Type:

NEO3WW : 30°

Luminous Intensity Distribution Diagram

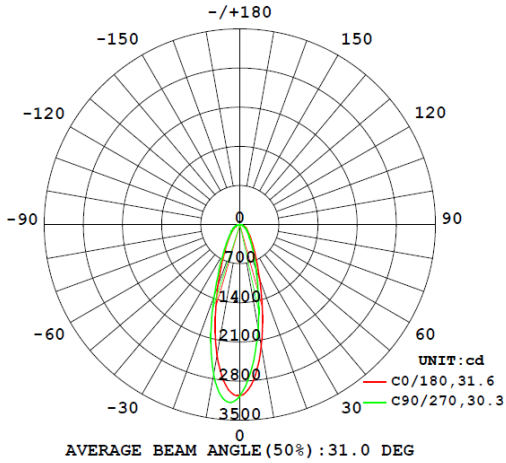


Isocandela Diagram

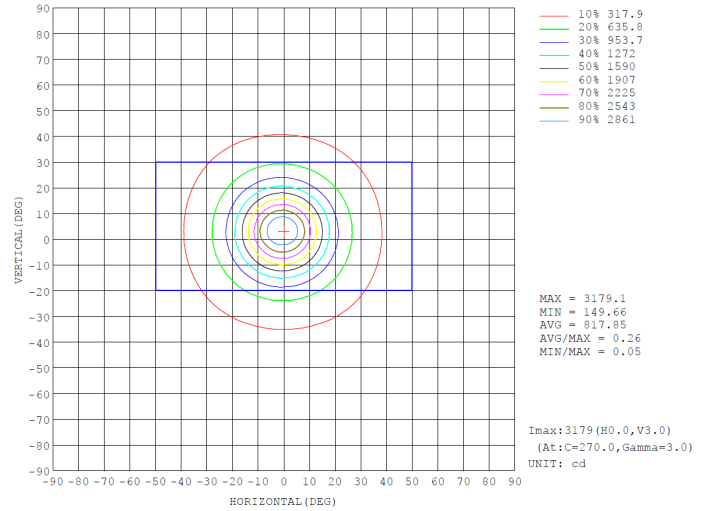


NEO3WW : 45°

Luminous Intensity Distribution Diagram

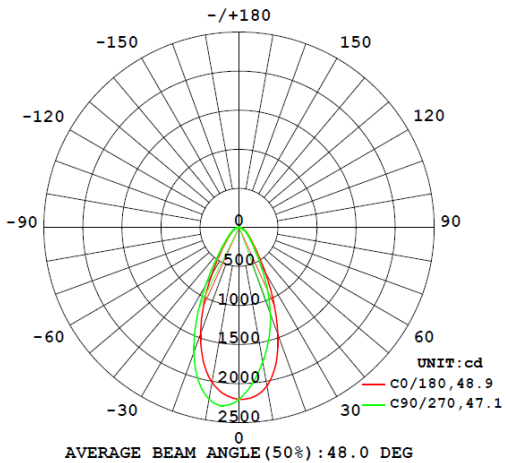


Isocandela Diagram

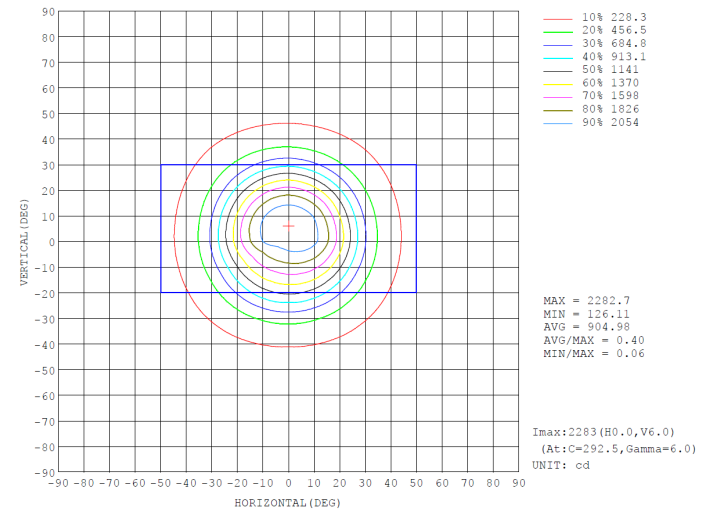

NEO3WW : 60°

Luminous Intensity Distribution Diagram

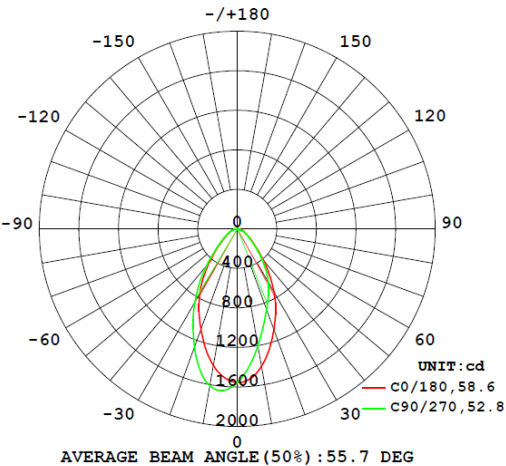

Isocandela Diagram

